

HALFEN HZA-PS Power Solution

European Technical Assessment ETA-17/0728



Leviat, the home of

HALFEN HZA-PS Power Solution

General note

Leviat is committed to minimising and, wherever possible, eliminating construction risk.

This certificate is an important indicator of our product's safety, reliability and quality, providing the industry with additional confidence in its suitability. It confirms that this product has passed specific performance and quality assurance criteria.

This assessment only applies to original HALFEN products, manufactured by Leviat. The specifications in the following pages are not transferable to other manufacturers' products. Inappropriate use of this information carries risk.

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-17/0728
of 9 December 2022

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

HALFEN Anchor Channel HZA-PS

Product family
to which the construction product belongs

Anchor channel

Manufacturer

Leviat GmbH
Liebigstraße 14
40764 Langenfeld
DEUTSCHLAND

Manufacturing plant

Leviat manufacturing plants

This European Technical Assessment
contains

25 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 330008-04-0601, Edition 06/2022

This version replaces

ETA-17/0728 issued on 23 February 2022

European Technical Assessment

ETA-17/0728

English translation prepared by DIBt

Page 2 of 25 | 9 December 2022

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The HALFEN Anchor Channel HZA-PS is a system consisting of a C-shaped serrated channel profile of steel and at least two metal anchors non-detachably fixed on the channel back and HALFEN serrated channel bolts.

The anchor channel is embedded surface-flush in the concrete. HALFEN serrated channel bolts with appropriate hexagon nuts and washers are fixed to the channel.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor channel is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor channel of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance under tension load (static and quasi-static loading)	
- Resistance to steel failure of anchors	$N_{Rk,s,a}$ see Annex C1
- Resistance to steel failure of the connection between anchors and channel	$N_{Rk,s,c}$ see Annex C1
- Resistance to steel failure of channel lips and subsequently pull-out of channel bolt	$N_{Rk,s,l}^0 ; S_{l,N}$ see Annex C1
- Resistance to steel failure of channel bolt	$N_{Rk,s}$ see Annex C1
- Resistance to steel failure by exceeding the bending strength of the channel	S_{max} see Annex A5 $M_{Rk,s,flex}$ see Annex C1
- Maximum installation torque to avoid damage during installation	$T_{inst,g} ; T_{inst,s}$ see Annex B4
- Resistance to pull-out failure of the anchor	$N_{Rk,p}$ see Annex C2
- Resistance to concrete cone failure	h_{ef} see Annex B3 $k_{cr,N} ; k_{ucr,N}$ see Annex C2
- Minimum edge distances, spacing and member thickness to avoid concrete splitting during installation	S_{min} see Annex A5 $c_{min} ; h_{min}$ see Annex B3
- Characteristic edge distance and spacing to avoid splitting of concrete under load	$S_{cr,sp} ; c_{cr,sp}$ see Annex C2
- Resistance to blowout failure - bearing area of anchor head	A_h see Annex A4

Essential characteristic	Performance
Characteristic resistance under shear load (static and quasi-static loading) - Resistance to steel failure of channel bolt under shear loading without lever arm - Resistance to steel failure by bending of the channel bolt under shear load with lever arm - Resistance to steel failure of channel lips, steel failure of connection between anchor and channel and steel failure of anchor (shear load in transverse direction) - Resistance to steel failure of connection between channel lips and channel bolt (shear load in longitudinal channel axis) - Factor for sensitivity to installation (longitudinal shear) - Resistance to steel failure of the anchor (longitudinal shear) - Resistance to steel failure of connection between anchor and channel (longitudinal shear) - Resistance to concrete pry-out failure - Resistance to concrete edge failure	$V_{Rk,s}$ see Annex C4 $M_{Rk,s}^0$ see Annex C4 $V_{Rk,s,l,y}^0 ; s_{l,v} ; V_{Rk,s,c,y} ; V_{Rk,s,a,y}$ see Annex C3 $V_{Rk,s,l,x}$ see Annex C3 γ_{inst} see Annex C3 $V_{Rk,s,a,x}$ see Annex C3 $V_{Rk,s,c,x}$ see Annex C3 k_8 see Annex C3 $k_{cr,v} ; k_{ucr,v}$ see Annex C3
Characteristic resistance under combined tension and shear load (static and quasi-static load) - Resistance to steel failure of the anchor channel	$k_{13} ; k_{14}$ see Annex C4
Characteristic resistance under fatigue tension loading - Fatigue resistance to steel failure of the whole system (continuous or tri-linear function, test method A1, A2) - Fatigue limit resistance to steel failure of the whole system (test method B) - Fatigue resistance to concrete related failure (exponential function, test method A1, A2) - Fatigue limit resistance to concrete related failure (test method B)	No performance assessed No performance assessed No performance assessed No performance assessed

Essential characteristic	Performance
Characteristic resistance under seismic loading (seismic performance category C1) - Resistance to steel failure under seismic tension loading (seismic performance category C1) - Resistance to steel failure under seismic shear loading for shear load in transverse direction (seismic performance category C1) - Resistance to steel failure under seismic shear loading for shear load in longitudinal channel axis (seismic performance category C1)	$N_{Rk,s,a,eq}$; $N_{Rk,s,c,eq}$; $N^0_{Rk,s,l,eq}$; $N_{Rk,s,eq}$; $M_{Rk,s,flex,eq}$ see Annex C5 $V_{Rk,s,eq}$; $V^0_{Rk,s,l,y,eq}$; $V_{Rk,s,c,y,eq}$; $V_{Rk,s,a,y,eq}$ see Annex C6 $V_{Rk,s,l,x,eq}$; $V_{Rk,s,a,x,eq}$; $V_{Rk,s,c,x,eq}$ see Annex C6
Characteristic resistance under static and quasi-static tension and/or shear loading - Displacements (static and quasi-static load)	δ_{N0} ; $\delta_{N\infty}$ see Annex C2 $\delta_{V,y,0}$; $\delta_{V,y,\infty}$; $\delta_{V,x,0}$; $\delta_{V,x,\infty}$ see Annex C4

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C7 and C8

3.3 Aspects of durability

Essential characteristic	Performance
Durability	See Annex B1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with EAD No. 330008-04-0601, the applicable European legal act is: [2000/273/EC].

The system to be applied is: 1


5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 9 December 2022 by Deutsches Institut für Bautechnik

Dipl.-Ing. Beatrix Wittstock
Head of Section

beglaubigt:
Müller

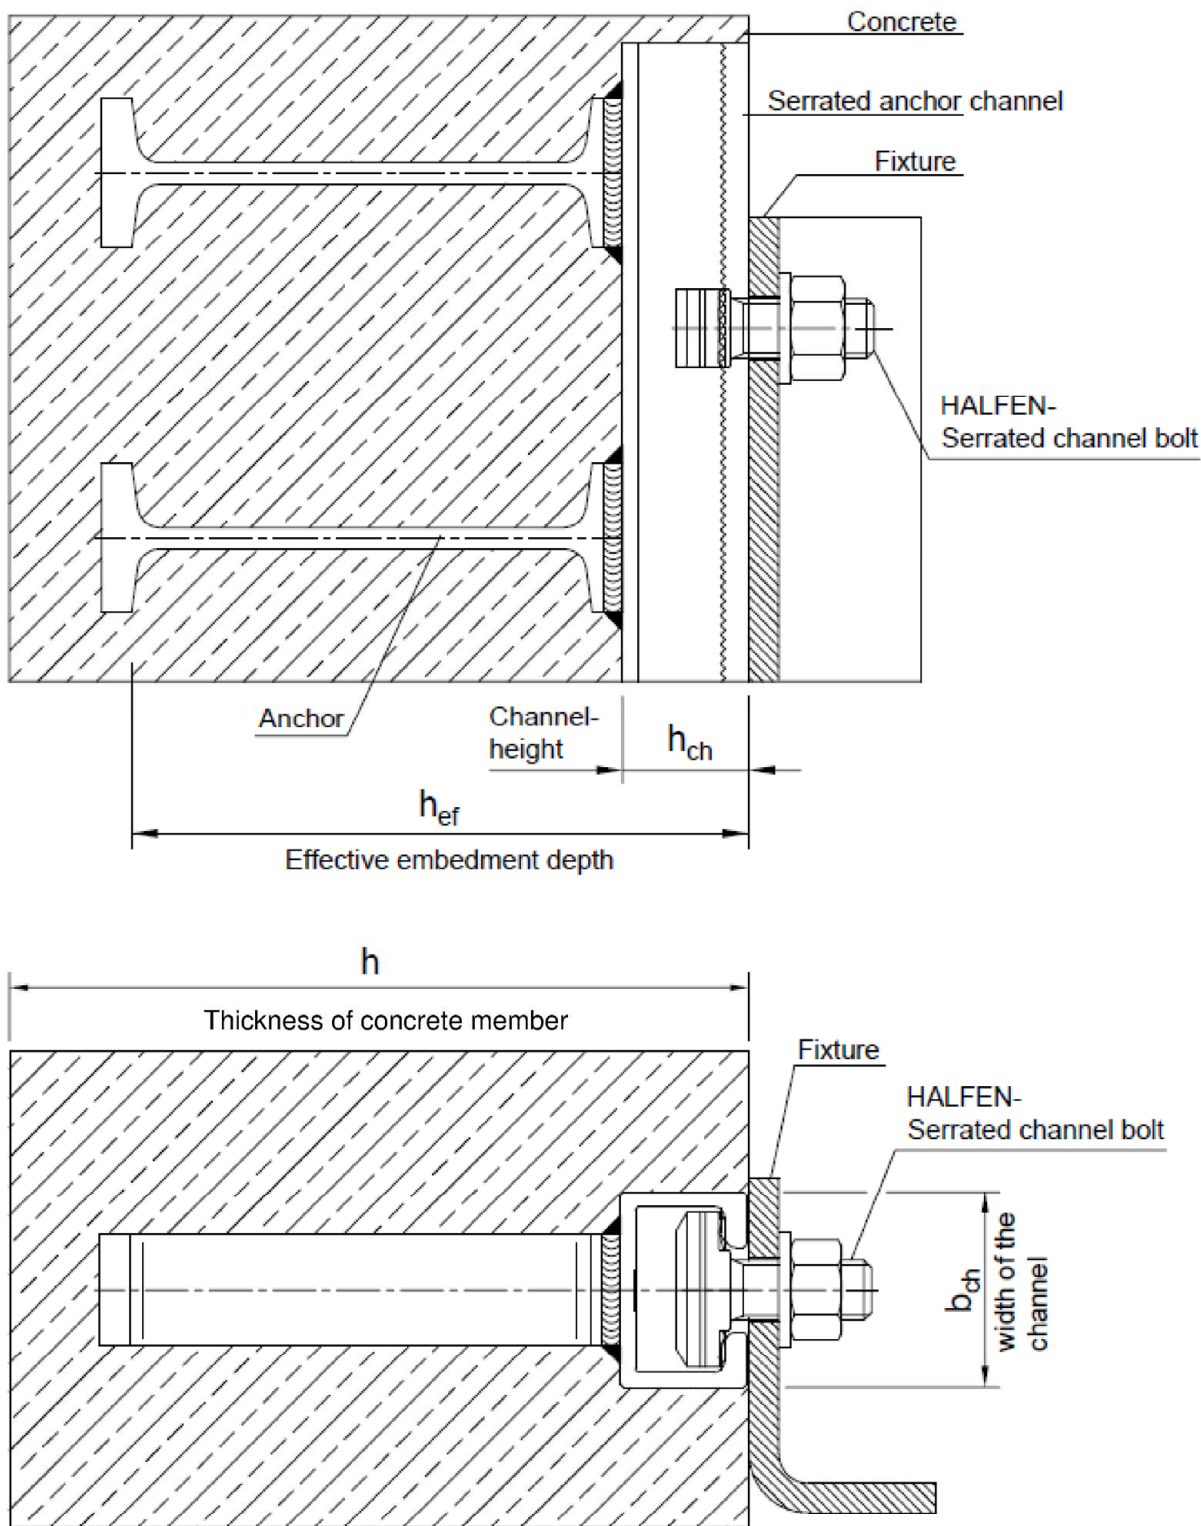

HALFEN Anchor Channel HZA-PS

Product description
Installed condition

Annex A1

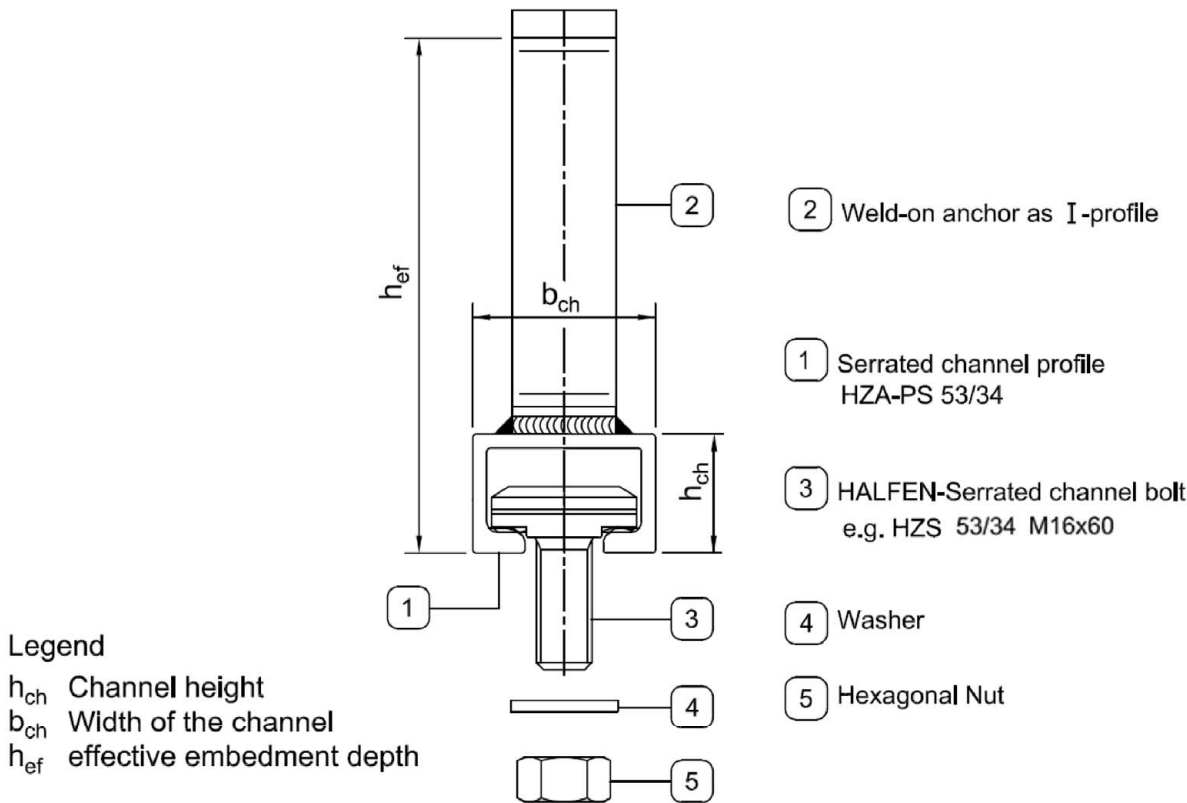




Table A0: Marking of anchor channel and serrated channel bolt

HALFEN anchor channel e.g. HZA-PS 53/34		HALFEN serrated channel bolt e.g. HALFEN 8.8	
 a) Stamped on inner side of channel back		 b) Printed on channel web	
Marking	Meaning	Marking	Meaning
General			
"H" or "HALFEN"	Identifying mark of producer	"H" or "HALFEN"	Identifying mark of producer
"ZA"	Type of anchor channel	"8.8"	Strength grade
"PS 53/34"	Size		
Material steel			
No marking	1.0044	No marking	Carbon steel or alloyed steel
Finish			
No marking	Hot-dip galvanized	No marking	hot-dip galvanized

HALFEN Anchor Channel HZA-PS

Product description
Marking and materials

Annex A2

Table A1: Materials and intended use

Item no.	Specification	Intended use	
		1	2
		Dry internal conditions	Internal conditions with usual humidity
		Anchor channels may only be used in structures subject to dry internal conditions	Anchor channels may also be used in structures subject to internal conditions with usual humidity. For examples see use conditions in Annex B1
		Materials	
①	Serrated channel profile	Steel 1.0044(A) hot-dip galvanized ≥ 55 µm ⁴⁾	Steel 1.0044(A) hot-dip galvanized ≥ 55 µm ⁴⁾
②	Anchor	Steel 1.0038, 1.0045(A) hot-dip galvanized ≥ 55 µm ⁴⁾	Steel 1.0038, 1.0045(A) hot-dip galvanized ≥ 55 µm ⁴⁾
③	HALFEN serrated channel bolts	Steel strength grade 8.8 EN ISO 898-1:2013 hot-dip galvanized ≥ 50 µm ^{1) 3)}	Steel strength grade 8.8 EN ISO 898-1:2013 hot-dip galvanized ≥ 50 µm ^{1) 3)}
④	Washer ⁵⁾ EN ISO 7089:2000 and EN ISO 7093-1:2000 production class A 200 HV	Steel electroplated ≥ 5 µm ²⁾	Steel hot-dip galvanized ≥ 50 µm ^{1) 3)}
⑤	Hexagonal nuts EN ISO 4032:2012	Steel strength grade 8 EN ISO 898-2:2012 electroplated ≥ 5 µm ²⁾	Steel strength grade 8 EN ISO 898-2:2012 hot-dip galvanized ≥ 50 µm ^{1) 3)}

¹⁾ or electroplated with special coating $\geq 12 \mu\text{m}$

(A) acc. EN 10025-2:2019

²⁾ electroplated acc. to EN ISO 4042:2018

³⁾ hot-dip-galvanized acc. to EN ISO 10684:2004 + AC2009

⁴⁾ hot-dip-galvanized acc. to EN ISO 1461:2009

⁵⁾ not included in scope of delivery

HALFEN Anchor Channel HZA-PS

Product description
Material and intended use

Annex A3

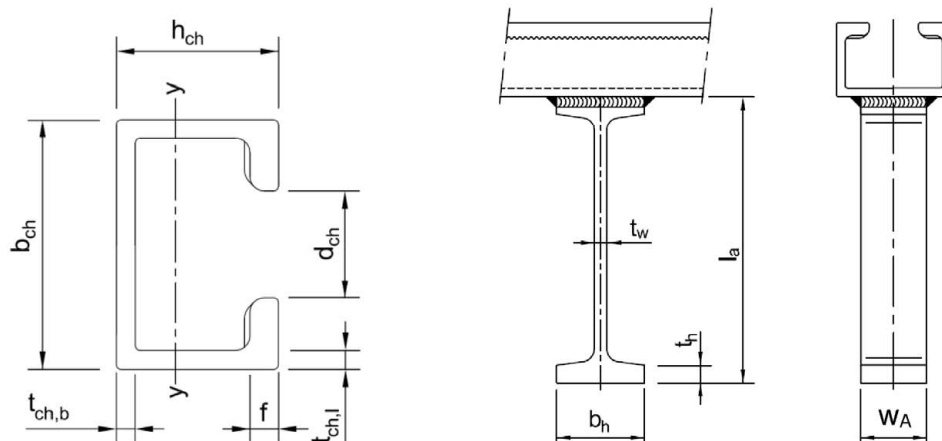


Table A2: Profile dimensions

Anchor channel HZA-PS	Dimensions						I _y
	b _{ch}	h _{ch}	t _{ch,b}	t _{ch,l}	d _{ch}	f	
	[mm]						[mm ⁴]
29/20	29,0	20,0	2,5	2,5	14,0	5,0	10.200
38/23	38,0	23,0	3,5	3,0	18,0	5,5	21.100
41/27	40,0	27,0	4,2	4,0	18,0	7,0	39.000
53/34	52,5	34,0	4,0	4,0	22,5	7,5	92.600
64/44	64,0	44,0	4,5	5,0	26,0	10,0	240.300

Table A3: Dimensions of anchor

Anchor channel HZA-PS	I-Anchor					
	$\min l_a$	t_w	b_h	t_h	w_A	A_h
	[mm]					
29/20	140	5,7	40	8	12 – 20	412
38/23	140	5,7	40	8	18 – 25	617
41/27	140	5,7	40	8	24 – 30	823
53/34	140	5,7	40	8	30 – 40	1029
64/44	140	5,7	40	8	40 – 50	1372

HALFEN Anchor Channel HZA-PS

Product description
Profile dimensions and dimensions of anchor

Annex A4

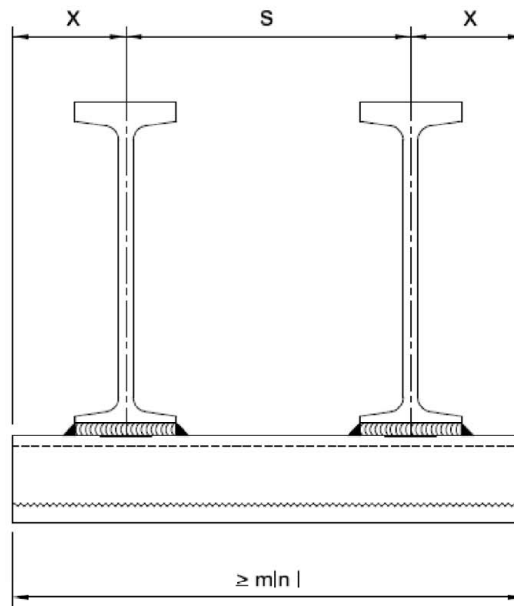


Table A4: Anchor positioning

Anchor channel HZA-PS	Anchor spacing		End spacing	Min. channel length
	s_{min}	s_{max}	X	l_{min}
	[mm]			
29/20	80	200	35	150
38/23	80	250	35	150
41/27	80	250	35	150
53/34	80	250	35	150
64/44	80	300	35	150

HALFEN Anchor Channel HZA-PS

Product description
Anchor positioning and channel length

Annex A5

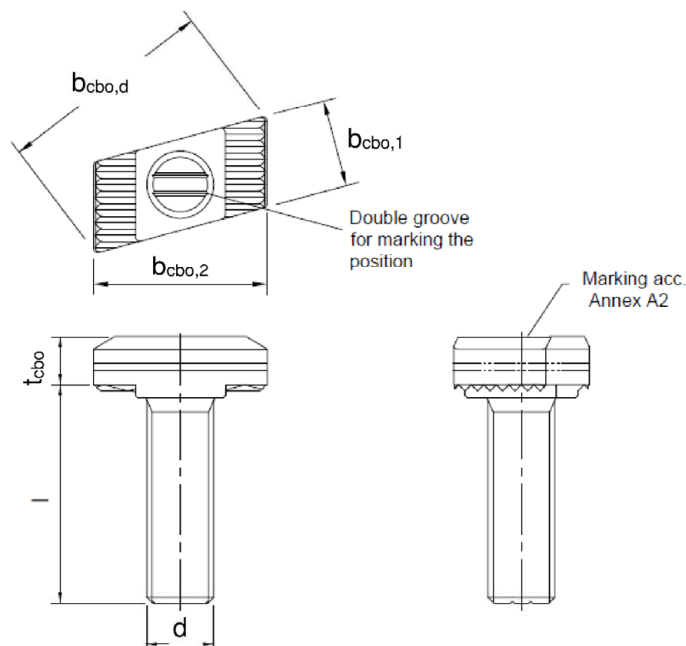


Table A5: Dimensions of HALFEN serrated channel bolt

Anchor channel HZA-PS	Serrated channel bolt HZS	Thread diameter	Dimensions			
			Width	Diagonal	Length	Thickness
			$b_{cbo,1}$	$b_{cbo,d}$	$b_{cbo,2}$	t_{cbo}
			[mm]	[mm]	[mm]	[mm]
29/20	29/20	M12	13,4	27,1	20,9	6,5
38/23 + 41/27	38/23	M12	17,0	37,0	28,8	8,0
		M16	17,0	37,0	28,8	9,5
53/34	53/34	M16	21,0	51,6	41,6	11,5
		M20	21,0	51,6	41,6	13,0
64/44	64/44	M20	24,7	63,1	51,0	14,0
		M24	24,7	63,1	51,0	16,0

Table A6: Strength grade

	Steel ¹⁾
Strength grade	8.8
f_{uk} [N/mm ²]	800
f_{yk} [N/mm ²]	640
Finish	Hot-dip galvanized

¹⁾ Materials according Annex A2, Tab. A0 and Annex A3, Tab. A1

HALFEN Anchor Channel HZA-PS	Annex A6
Product description HALFEN serrated channel bolt, dimensions, strength grade	

Specifications for intended use

Serrated anchor channels and serrated channel bolts subject to:

- Static and quasi-static tension, shear perpendicular to the longitudinal axis of the channel and shear in the direction of the longitudinal axis of the channel
- Seismic tension, seismic shear perpendicular to the longitudinal axis of the channel and seismic shear in the direction of the longitudinal axis of the channel (seismic performance category C1)
- Fire exposure for concrete class C20/25 to C50/60

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2000.
- Strength classes C12/15 to C90/105 according to EN 206-1:2000.
- Cracked or uncracked concrete.

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions
(serrated anchor channels and serrated channel bolts according to Annex A3, Table A1, column 1-2)
- Structures subject to internal conditions with usual humidity (e.g. kitchen, bath and laundry in residential buildings, exceptional permanent damp conditions and application under water)
(serrated anchor channels and serrated channel bolts according to Annex A3, Table A1, column 2)

Design:

- Anchor channels are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor channel and serrated channel bolts are indicated on the design drawings (e.g. position of the anchor channel relative to the reinforcement or to supports).
- For static and quasi-static loading as well as seismic loading (seismic performance category C1) and fire exposure the anchor channels are designed in accordance with EOTA TR 047 "Design of Anchor Channels", May 2021 or EN 1992-4:2018.
- The characteristic resistances are calculated with the minimum effective embedment depth.

HALFEN Anchor Channel HZA-PS

Intended use
Specifications

Annex B1

Installation:


- The installation of anchor channels is carried out by appropriately qualified personnel under the supervision of the person responsible for the technical matters on site.
- Use of the anchor channels only as supplied by the manufacturer – without any manipulations, repositioning or exchanging of channel components.
- Cutting of anchor channels is allowed only if pieces according to Annex A5, Table A4 are generated including end spacing and minimum channel length and only to be used in dry internal conditions (Annex A3, Table A1, column 1).
- Installation in accordance with the installation instruction given in Annexes B5 and B6.
- The anchor channels are fixed on the formwork, reinforcement or auxiliary construction such that no movement of the anchor channels will occur during the time of laying the reinforcement and of placing and compacting the concrete.
- The concrete under the head of the anchors is properly compacted. The anchor channels are protected from penetration of concrete into the internal space of the channel profiles.
- Washer may be chosen according to Annex A3 and provided separately by the user.
- Orientating the serrated channel bolt (double groove according to Annex A6) rectangular to the channel axis.
- The required installation torque given in Annex B4 must be applied and must not be exceeded.

HALFEN Anchor Channel HZA-PS

Intended use
Specifications

Annex B2

Plan view

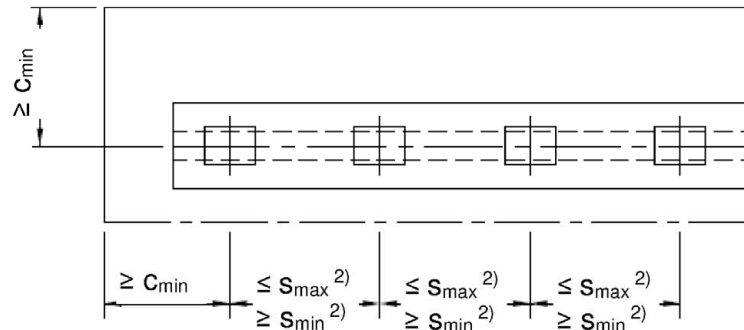

Side view

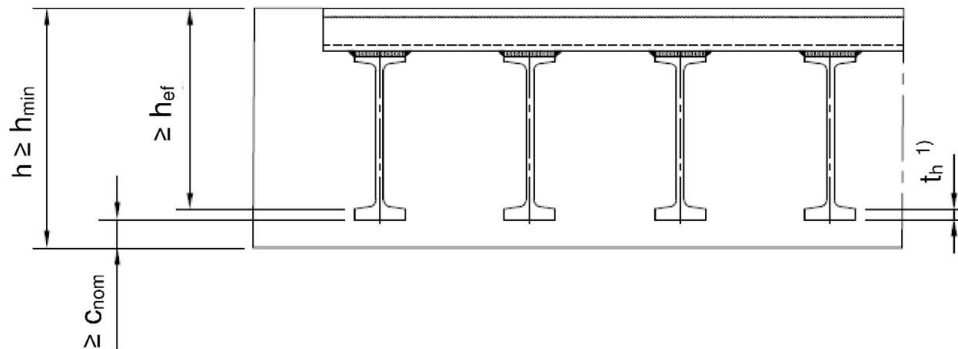


Table B1: Effective embedment depth, edge distance and thickness of concrete member

Anchor channel			HZA-PS 29/20	HZA-PS 38/23	HZA-PS 41/27	HZA-PS 53/34	HZA-PS 64/44
Minimum effective embedment depth	[mm]	$h_{ef,min}$	152	155	159	166	176
Minimum edge distance		c_{min}	50	75	75	100	125
Minimum thickness of concrete member		h_{min}	$h_{ef} + t_h + c_{nom}^3)$				
			170	173	177	190	200

¹⁾ t_h = Anchor head thickness

²⁾ s_{min} , s_{max} acc. to Annex A5, Tab. A4

³⁾ c_{nom} acc. to EN 1992-1-1 :2004 + AC 2010

HALFEN Anchor Channel HZA-PS


Intended use
Installation parameters of anchor channels

Annex B3

General

The fixture is in contact with the channel profile and the concrete surface.
The installation torque according to Annex B4, Table B2 shall be applied and must not be exceeded.

Fig. 1

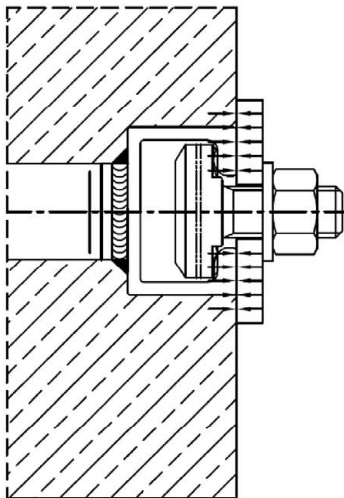

Steel – Steel contact

The fixture is not in contact with the concrete surface. The fixture is fastened to the anchor channel by suitable steel parts (e.g. washer).
The installation torque according to Annex B4, Table B2 shall be applied and must not be exceeded.

Fig. 2

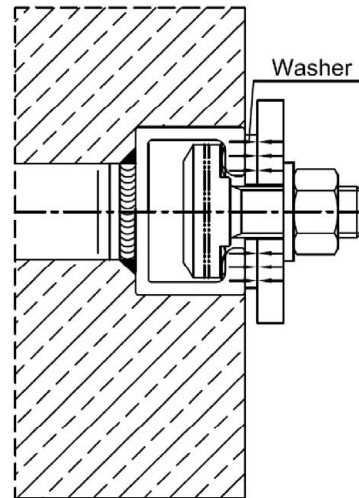


Table B2: Minimum spacing and installation torque of HALFEN serrated channel bolt

Serrated anchor channel HZA-PS	HALFEN serrated channel bolts d [mm]	Min. spacing $s_{min, cbo}$ of the serrated channel bolts [mm]	Installation torque T_{inst} ³⁾	
			General ¹⁾ $T_{inst, g}$	Steel – Steel contact ²⁾ $T_{inst, s}$
			Steel 8.8	Steel 8.8
			[Nm]	[Nm]
29/20	12	60	40	75
38/23	12	60	65	75
	16	80	90	185
41/27	12	60	75	75
	16	80	135	185
53/34	16	80	185	185
	20	100	235	360
64/44	20	100	300	360
	24	120	360	625

¹⁾ According to figure 1

²⁾ According to figure 2


³⁾ T_{inst} must not be exceeded.

HALFEN Anchor Channel HZA-PS

Intended use
Installation parameters of HALFEN serrated channel bolt

Annex B4

Installation of anchor channel

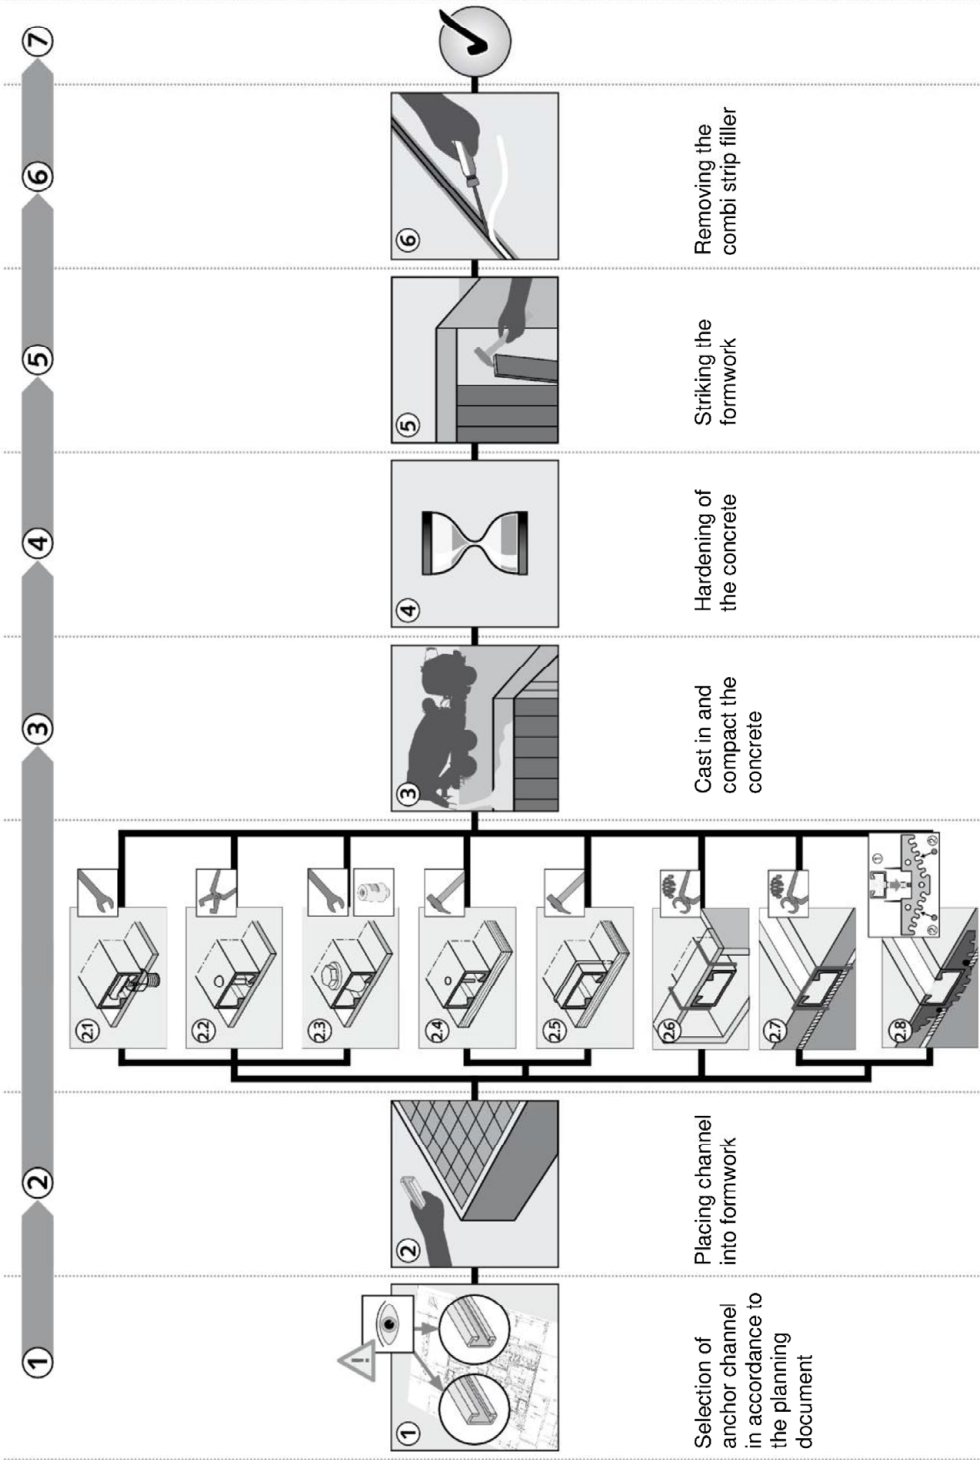


- 2.1 Steel formwork: Fixing with HALFEN serrated channel bolts through formwork penetration
- 2.2 Steel formwork: Fixing with rivets
- 2.3 Steel formwork: Fixing with HALFEN Fixing cone
- 2.4 Timber formwork: Fixing with nails
- 2.5 Timber formwork: Fixing with staples
- 2.6 Fixing in the top surface of concrete: Fixing by using auxiliary construction
- 2.7 Fixing in the top surface of concrete: Fixing from above directly to the reinforcement
- 2.8 Fixing in the top surface of concrete: Fixing from above to the reinforcement, using the HALFEN ChanClip

HALFEN Anchor Channel HZA-PS

Intended use
Installation instruction of serrated anchor channel

Annex B5

Installation of HALFEN serrated channel bolt

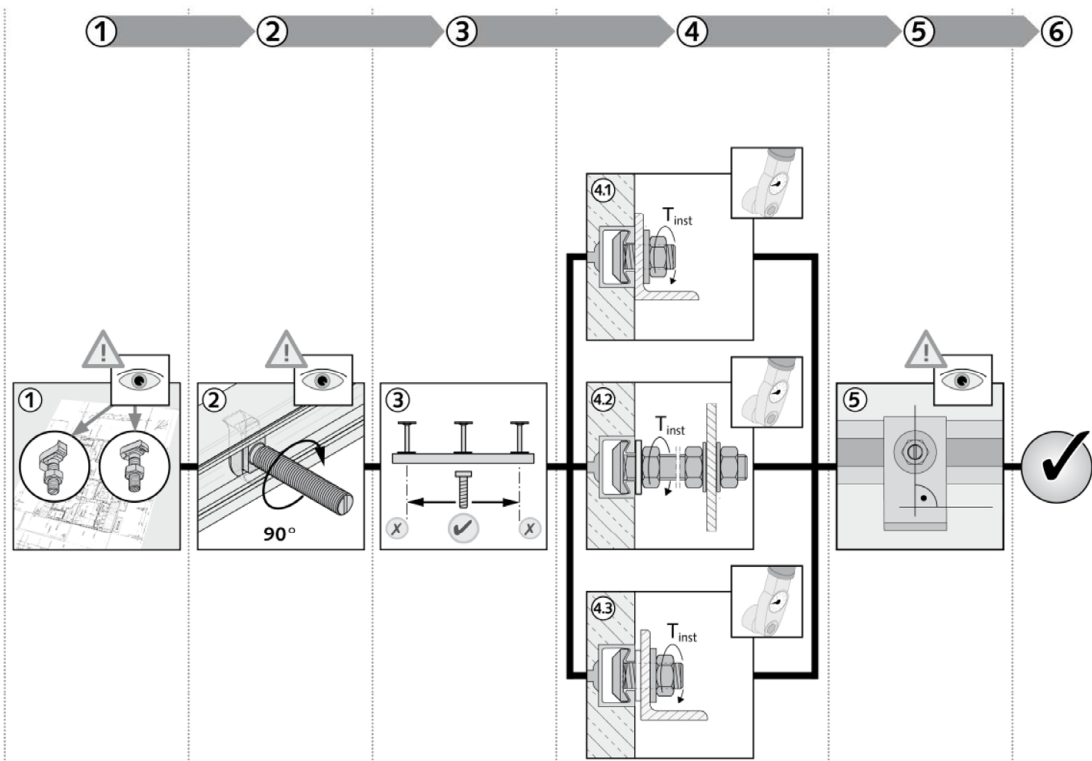

Selection of the HALFEN serrated channel bolts in accordance with the planning document.

Insert the HALFEN serrated channel bolts into the channel slot. After a 90° turn clockwise the HALFEN screw locks into position (check whether the groove mark is perpendicular to the channel longitudinal axis).

Positioning of the HALFEN serrated channel bolts: At the channel ends a minimum clearance must be maintained, which corresponds with the overhang beyond the last anchor acc. to

Tighten the hexagonal nut to the installation torque (T_{inst}) acc. table stated below.
 T_{inst} has to be respected.
4.1: general application,
4.2 and 4.3: steel to steel contact.

After tightening the nut check if the groove mark on the HALFEN serrated channel bolt is perpendicular to the channel longitudinal axis. If it is not perpendicular the channel bolt must be completely loosened, re-inserted and tightened again.

Table B3: Installation Torque

Pos. of fixture acc. to annex B3	Material strength grade		Anchor channel HZA-PS	T_{inst} [Nm] ¹⁾			
				M12	M16	M20	M24
General	Steel	8.8	29/20	40	– ²⁾	– ²⁾	– ²⁾
			38/23	65	90	– ²⁾	– ²⁾
			41/27	75	135	– ²⁾	– ²⁾
			53/34	– ²⁾	185	235	– ²⁾
			64/44	– ²⁾	– ²⁾	300	360
Steel – Steel contact			all	75	185	360	625

¹⁾ T_{inst} must not be exceeded

²⁾ Product not available

HALFEN Anchor Channel HZA-PS

Intended use
Installation instruction of HALFEN serrated channel bolt

Annex B6

Table C1: Characteristic resistances under tension load – steel failure
serrated anchor channel

Anchor channel			HZA-PS 29/20	HZA-PS 38/23	HZA-PS 41/27	HZA-PS 53/34	HZA-PS 64/44
Steel failure: Anchor							
Characteristic resistance	N _{Rk,s,a}	[kN]	24,6	36,9	64,3	80,3	100,0
Partial factor	γ _{Ms,a} ¹⁾		1,8		1,59		
Steel failure: Connection between anchor and channel							
Characteristic resistance	N _{Rk,s,c}	[kN]	71,7	76,4	95,4	117,7	128,4
Partial factor	γ _{Ms,ca} ¹⁾		1,8				
Steel failure: Local flexure of the channel lips							
Spacing of serrated channel bolts for N ⁰ _{Rk,s,l}	S _{l,N}	[mm]	58	76	80	105	128
Characteristic resistance	N ⁰ _{Rk,s,l}	[kN]	22,9	39,3	53,6	82,5	106,1
Partial factor	γ _{Ms,l} ¹⁾		1,8				

¹⁾ In absence of other national regulations

Table C2: Characteristic flexural resistance of channel

Anchor channel			HZA-PS 29/20	HZA-PS 38/23	HZA-PS 41/27	HZA-PS 53/34	HZA-PS 64/44
Steel failure: Flexure of channel							
Characteristic flexural resistance of channel	$M_{Rk,s,flex}$	[Nm]	872	1663	2289	4069	7183
Partial factor	$\gamma_{Ms,flex}$	¹⁾	1,15				

¹⁾ In absence of other national regulations

Table C3: Characteristic resistance under tension load – steel failure of
HALFEN serrated channel bolt

HALFEN serrated channel bolt thread diameter			M12	M16	M20	M24
Steel failure						
Characteristic resistance	$N_{Rk,s}$	[kN]	67,4	125,6	196,0	282,4
Partial factor	γ_{Ms}	¹⁾	1,50			

¹⁾ In absence of other national regulations

HALFEN Anchor Channel HZA-PS

Performance
Characteristic resistances under tension load – steel failure

Annex C1

Table C4: Characteristic resistances under tension load – concrete failure

Anchor channel				HZA-PS 29/20	HZA-PS 38/23	HZA-PS 41/27	HZA-PS 53/34	HZA-PS 64/44
Concrete failure: Pull-out failure								
Characteristic resistance in cracked concrete C12/15		N _{Rk,p}	[kN]	37,0	55,5	74,0	92,6	123,4
Characteristic resistance in uncracked concrete C12/15				51,8	77,7	103,7	129,6	172,8
Increasing factor for N _{Rk,p} = N _{Rk,p} (C12/15) · Ψ _c	C20/25	Ψ _c	[-]	1,67				
	C25/30			2,08				
	C30/37			2,50				
	C35/45			2,92				
	C40/50			3,33				
	C45/55			3,75				
	C50/60			4,17				
	C55/67			4,58				
	≥C60/75			5,00				
Partial factor		γ _{Mp} = γ _{Mc} ¹⁾		1,5				
Concrete failure: Concrete cone failure								
Product factor k ₁		k _{cr,N}		8,7	8,7	8,7	8,8	8,9
		k _{ucr,N}		12,4	12,4	12,5	12,5	12,7
Characteristic edge distance		c _{cr,N}	[mm]	259	260	263	266	269
Characteristic spacing		s _{cr,N}		518	520	526	532	538
Partial factor		γ _{Mc} ¹⁾		1,5				
Concrete failure: Splitting failure								
Characteristic edge distance		c _{cr,sp}	[mm]	456	465	477	498	528
Characteristic spacing		s _{cr,sp}		912	930	954	996	1056
Partial factor		γ _{Msp} ¹⁾		1,5				

¹⁾ In absence of other national regulations

Table C5: Displacements under tension load

Anchor channel			HZA-PS 29/20	HZA-PS 38/23	HZA-PS 41/27	HZA-PS 53/34	HZA-PS 64/44
Tension load	N	[kN]	9,1	14,6	21,3	31,2	39,7
Short-term displacement	δ_{N0}	[mm]	0,5	0,8	0,9	1,5	0,6
Long-term displacement	$\delta_{N\infty}$	[mm]	1,0	1,6	1,8	3,0	1,2

HALFEN Anchor Channel HZA-PS

Performance
Characteristic resistance under tension load – concrete failure and displacements

Annex C2

Table C6: Characteristic resistances under shear

Anchor channel			HZA-PS 29/20	HZA-PS 38/23	HZA-PS 41/27	HZA-PS 53/34	HZA-PS 64/44
Steel failure: Anchor							
Characteristic resistance	$V_{Rk,s,a,y}$	[kN]	22,9	43,9	53,6	101,1	156,3
Characteristic resistance	$V_{Rk,s,a,x}$	[kN]	14,8	22,2	38,6	48,2	64,3
Partial factor	$\gamma_{Ms,a}$ ¹⁾		1,5		1,32		
Steel failure: Connection between anchor and channel							
Characteristic resistance	$V_{Rk,s,c,y}$	[kN]	22,9	43,9	53,6	101,1	156,3
	$V_{Rk,s,c,x}$	[kN]	46,7	46,7	58,3	68,0	77,8
Partial factor	$\gamma_{Ms,ca}$ ¹⁾		1,8				
Steel failure: Local flexure of channel lips under shear load perpendicular to the longitudinal axis of the channel							
Spacing of serrated channel bolt for $V_{Rk,s,l}$	$s_{l,v}$	[mm]	58	76	80	105	128
Characteristic resistance	$V^0_{Rk,s,l,y}$	[kN]	22,9	43,9	53,6	101,1	156,3
Partial factor	$\gamma_{Ms,l}$ ¹⁾		1,8				
Steel failure: Connection between channel lips and channel bolt under shear in the direction of longitudinal channel axis							
Characteristic resistance	$V_{Rk,s,l,x}$	[kN]	12,6	25,4	27,2 (M12) 32,1 (M16)	59,0	85,8
Installation factor	γ_{inst}		1,0	1,2			
Concrete failure: Pry-out failure							
Product factor	k_8 ²⁾		2,0				
Partial factor	γ_{Mc} ¹⁾		1,5				
Concrete failure: Concrete edge failure							
Product factor k_{12}	Cracked concrete	$k_{cr,v}$	6,1	7,5			
	Uncracked concrete	$k_{ucr,v}$	8,5	10,5			
Partial factor	γ_{Mc} ¹⁾		1,5				

¹⁾ In absence of other national regulations

²⁾ Without supplementary reinforcement. In case of supplementary reinforcement factor k_8 should be multiplied by 0,75.

HALFEN Anchor Channel HZA-PS

Performance
Characteristic resistance under shear load

Annex C3

Table C7: Displacements under shear load

Anchor channel			HZA-PS 29/20	HZA-PS 38/23	HZA-PS 41/27	HZA-PS 53/34	HZA-PS 64/44
Shear load	V_y	[kN]	9,1	17,4	21,3	31,2	62,0
Short-term displacement	δ_{v0}	[mm]	0,9	0,7	0,9	0,9	1,9
Long-term displacement	$\delta_{v\infty}$	[mm]	1,4	1,0	1,4	1,4	2,85
Shear load	V_x	[kN]	5,0	8,4	10,6	19,5	28,4
Short-term displacement	δ_{v0}	[mm]	0,4	0,2	0,2	0,3	0,9
Long-term displacement	$\delta_{v\infty}$	[mm]	0,6	0,3	0,3	0,5	1,4

Table C8: Characteristic resist. under shear load – steel failure of HALFEN serrated channel bolt

HALFEN serrated channel bolt thread diameter			M12	M16	M20	M24
Steel failure						
Characteristic resistance	$V_{Rk,s}$	[kN]	33,7	62,8	98,0	141,2
Characteristic flexure resistance	$M^0_{Rk,s}$	[Nm]	105	266	519	898
Partial factor	$\gamma_{Ms}^{1)}$		1,25			

¹⁾ In absence of other national regulations

Table C9: Characteristic resistance under combined tension and shear load

Anchor channel		HZA-PS 29/20	HZA-PS 38/23	HZA-PS 41/27	HZA-PS 53/34	HZA-PS 64/44
Steel failure: Local failure by flexure of channel lips and failure by flexure of channel						
Product factor	k ₁₃	Values according to EN 1992-4:2018, Section 7.4.3.1				
Steel failure: Failure of anchor and connection between anchor and channel						
Product factor	k ₁₄	Values according to EN 1992-4:2018, Section 7.4.3.1				

HALFEN Anchor Channels HZA-PS

Performances
Displacements under shear load, char. resistance of HALFEN serrated channel bolt
under shear, combined tension and shear load

Annex C4

For seismic performance category C1

Table C10: Characteristic resistances under seismic tension load
– steel failure serrated anchor channel

Anchor channel			HZA-PS 29/20	HZA-PS 38/23	HZA-PS 41/27	HZA-PS 53/34	HZA-PS 64/44
Steel failure: Anchor							
Characteristic resistance	N _{Rk,s,a,eq}	[kN]	- ²⁾	36,9	- ²⁾	80,3	- ²⁾
Partial factor	γ _{Ms,a} ¹⁾		1,8		1,59		
Steel failure: Connection between anchor and channel							
Characteristic resistance	N _{Rk,s,c,eq}	[kN]	- ²⁾	76,4	- ²⁾	117,7	- ²⁾
Partial factor	γ _{Ms,ca} ¹⁾		1,8				
Steel failure: Local flexure of the channel lips							
Spacing of serrated channel bolts for N ⁰ _{Rk,s,l,eq}	S _{l,N}	[mm]		76		105	
Characteristic resistance	N ⁰ _{Rk,s,l,eq}	[kN]	- ²⁾	39,3	- ²⁾	82,5	- ²⁾
Partial factor	γ _{Ms,l} ¹⁾		1,8				

¹⁾ In absence of other national regulations

²⁾ No performance assessed

Table C11: Characteristic flexural resistance of channel under seismic tension load

Anchor channel			HZA-PS 29/20	HZA-PS 38/23	HZA-PS 41/27	HZA-PS 53/34	HZA-PS 64/44
Steel failure: Flexure of channel							
Characteristic flexural resistance of channel	$M_{Rk,s,flex,eq}$	[Nm]	- ²⁾	1663	- ²⁾	4069	- ²⁾
Partial factor	$\gamma_{Ms,flex}$ ¹⁾		1,15				

¹⁾ In absence of other national regulations

²⁾ No performance assessed

Table C12: Characteristic resistance under seismic tension load –
steel failure of HALFEN serrated channel bolt

HALFEN serrated channel bolt thread diameter			M12	M16	M20	M24
Steel failure						
Characteristic resistance	$N_{Rk,s,eq}$	[kN]	67,4	125,6	196,0	282,4
Partial factor	γ_{Ms} ¹⁾		1,50			

¹⁾ In absence of other national regulations

HALFEN Anchor Channels HZA-PS

Performances
Char. resistances under seismic tension load (seismic performance category C1)

Annex C5

Table C13: Characteristic resistances under seismic shear load

Anchor channel			HZA-PS 29/20	HZA-PS 38/23	HZA-PS 41/27	HZA-PS 53/34	HZA-PS 64/44
Steel failure: Anchor							
Characteristic resistance	$V_{Rk,s,a,y,eq}$	[kN]	- ²⁾	43,9	- ²⁾	101,1	- ²⁾
Characteristic resistance	$V_{Rk,s,a,x,eq}$	[kN]	- ²⁾	22,2	- ²⁾	48,2	- ²⁾
Partial factor	$\gamma_{Ms,a}$ ¹⁾		1,5		1,32		
Steel failure: Connection between anchor and channel							
Characteristic resistance	$V_{Rk,s,c,y,eq}$	[kN]	- ²⁾	43,9	- ²⁾	101,1	- ²⁾
	$V_{Rk,s,c,x,eq}$	[kN]	- ²⁾	46,7	- ²⁾	68,0	- ²⁾
Partial factor	$\gamma_{Ms,ca}$ ¹⁾		1,8				
Steel failure: Local flexure of channel lips under shear load perpendicular to the longitudinal axis of the channel							
Spacing of serrated channel bolt for $V_{Rk,s,l,eq}$	$s_{l,v}$	[mm]	- ²⁾	76	- ²⁾	105	- ²⁾
Characteristic resistance	$V_{Rk,s,l,y,eq}^0$	[kN]	- ²⁾	43,9	- ²⁾	101,1	- ²⁾
Partial factor	$\gamma_{Ms,l}$ ¹⁾		1,8				
Steel failure: Connection between channel lips and channel bolt under shear in the direction of longitudinal channel axis							
Characteristic resistance	$V_{Rk,s,l,x,eq}$	[kN]	- ²⁾	25,4	- ²⁾	59,0	- ²⁾
Installation factor	γ_{inst}		1,0	1,2			

¹⁾ In absence of other national regulations

²⁾ No performance assessed

Table C14: Characteristic resistances under seismic shear load –
steel failure of HALFEN serrated channel bolt

HALFEN serrated channel bolt thread diameter			M12	M16	M20	M24
Steel failure						
Characteristic resistance	$V_{Rk,s,eq}$	[kN]	33,7	62,8	98,0	141,2
Partial factor	γ_{Ms} ¹⁾		1,25			

¹⁾ In absence of other national regulations

HALFEN Anchor Channel HZA-PS

Performances
Char. resistances under seismic shear load (seismic performance category C1)

Annex C6

Table C15: Characteristic resistances under tension and shear load under fire exposure
– steel failure

Anchor channel				HZA-PS 29/20	HZA-PS 38/23	HZA-PS 41/27	HZA-PS 53/34	HZA-PS 64/44	
Steel failure: Anchor, Connection anchor / channel, Local flexure of channel lips, Channel bolts									
Characteristic resistances	R30	M12	$N_{Rk,s,fi}$ = $V_{Rk,s,y,fi}$	[kN]	2,7	3,5	3,5	_ ²⁾	_ ²⁾
		M16			_ ²⁾	4,5	4,5	4,5	_ ²⁾
		M20			_ ²⁾	_ ²⁾	_ ²⁾	10,3	10,3
		M24			_ ²⁾	_ ²⁾	_ ²⁾	_ ²⁾	17,0
	R60	M12			2,1	2,7	2,7	_ ²⁾	_ ²⁾
		M16			_ ²⁾	3,3	3,3	3,3	_ ²⁾
		M20			_ ²⁾	_ ²⁾	_ ²⁾	7,8	7,8
		M24			_ ²⁾	_ ²⁾	_ ²⁾	_ ²⁾	14,8
	R90	M12			1,5	1,9	1,9	_ ²⁾	_ ²⁾
		M16			_ ²⁾	2,1	2,1	2,1	_ ²⁾
		M20			_ ²⁾	_ ²⁾	_ ²⁾	5,3	5,3
		M24			_ ²⁾	_ ²⁾	_ ²⁾	_ ²⁾	9,9
	R120	M12			1,3	1,5	1,5	_ ²⁾	_ ²⁾
		M16			_ ²⁾	1,5	1,5	1,5	_ ²⁾
		M20			_ ²⁾	_ ²⁾	_ ²⁾	4,0	4,0
		M24			_ ²⁾	_ ²⁾	_ ²⁾	_ ²⁾	7,4
Partial factor			$\gamma_{Ms,fi}$ ¹⁾	[-]	1,0				

¹⁾ In absence of other national regulations

²⁾ No performance assessed

Table C16: Minimum edge distance and spacing under fire exposure – concrete failure

Anchor channel			HZA-PS 29/20	HZA-PS 38/23	HZA-PS 41/27	HZA-PS 53/34	HZA-PS 64/44
Concrete failure ¹⁾							
Minimum edge distance	$c_{min,fi}$	[mm]	304	310	318	332	352
Minimum spacing	$s_{min,fi}$		608	620	636	664	704

HALFEN Anchor Channels HZA-PS

Performances
Characteristic resistances under tension and shear load under fire exposure

Annex C7

Table C17: Characteristic resistances under tension and shear load under fire exposure – min. axis distance of reinforcement

Anchor channel				HZA-PS 29/20	HZA-PS 38/23	HZA-PS 41/27	HZA-PS 53/34	HZA-PS 64/44
Min. axis distance of reinforcement								
Min. axis distance	R30	a	[mm]	35	35	35	40	50
	R60	a		35	35	35	40	50
	R90	a		35	35	35	40	50
	R120	a		50	50	50	50	50

Fig. 1


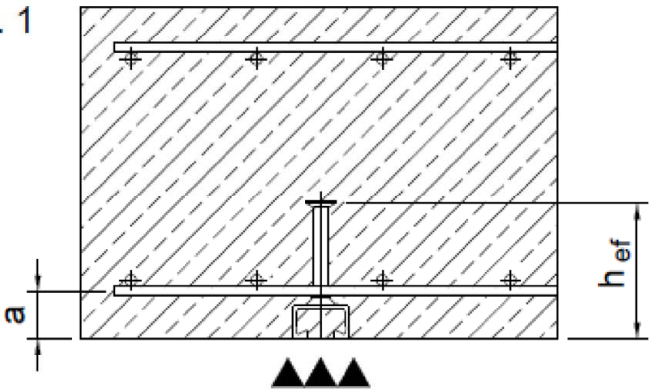


Fig. 2

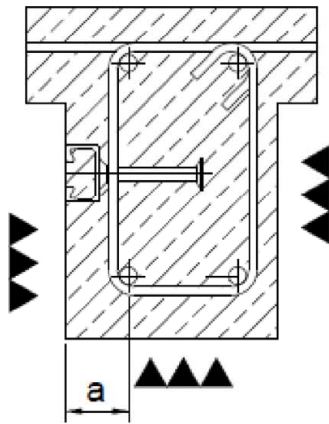

HALFEN Anchor Channels HZA-PS

Performances
Characteristic resistances under tension and shear load under fire exposure

Annex C8

For more information on the products featured here, please contact Leviat:

Australia

Leviat

98 Kurrajong Avenue,
Mount Druitt, Sydney, NSW 2770
Tel: +61 - 2 8808 3100
Email: info.au@leviat.com

Austria

Leviat

Leonard-Bernstein-Str. 10
Saturn Tower, 1220 Wien
Tel: +43 - 1 - 259 6770
Email: info.at@leviat.com

Belgium

Leviat

Industrielaan 2
1740 Ternat
Tel: +32 - 2 - 582 29 45
Email: info.be@leviat.com

China

Leviat

Room 601 Tower D, Vantone Centre
No. A6 Chao Yang Men Wai Street
Chaoyang District
Beijing · P.R. China 100020
Tel: +86 - 10 5907 3200
Email: info.cn@leviat.com

Czech Republic

Leviat

Business Center Šafránková
Šafránková 1238/1
155 00 Praha 5
Tel: +420 - 311 - 690 060
Email: info.cz@leviat.com

Finland

Leviat

Vädursgatan 5
412 50 Göteborg / Sweden
Tel: +358 (0)10 6338781
Email: info.fi@leviat.com

France

Leviat

6, Rue de Cabanis
FR 31240 L'Union
Toulouse
Tel: +33 - 5 - 34 25 54 82
Email: info.fr@leviat.com

Germany

Leviat

Liebigstrasse 14
40764 Langenfeld
Tel: +49 - 2173 - 970 - 0
Email: info.de@leviat.com

India

Leviat

309, 3rd Floor, Orion Business Park
Ghodbunder Road, Kapurbawdi,
Thane West, Thane,
Maharashtra 400607
Tel: +91 - 22 2589 2032
Email: info.in@leviat.com

Italy

Leviat

Via F.lli Bronzetti 28
24124 Bergamo
Tel: +39 - 035 - 0760711
Email: info.it@leviat.com

Malaysia

Leviat

28 Jalan Anggerik Mokara 31/59
Kota Kemuning, 40460 Shah Alam
Selangor
Tel: +603 - 5122 4182
Email: info.my@leviat.com

Netherlands

Leviat

Oostermaat 3
7623 CS Borne
Tel: +31 - 74 - 267 14 49
Email: info.nl@leviat.com

New Zealand

Leviat

2/19 Nuttall Drive, Hillsborough,
Christchurch 8022
Tel: +64 - 3 376 5205
Email: info.nz@leviat.com

Norway

Leviat

Vestre Svanholmen 5
4313 Sandnes
Tel: +47 - 51 82 34 00
Email: info.no@leviat.com

Philippines

Leviat

2933 Regus, Joy Nostalg,
ADB Avenue
Ortigas Center
Pasig City
Tel: +63 - 2 7957 6381
Email: info.ph@leviat.com

Poland

Leviat

Ul. Obornicka 287
60-691 Poznań
Tel: +48 - 61 - 622 14 14
Email: info.pl@leviat.com

Singapore

Leviat

14 Benoi Crescent
Singapore 629977
Tel: +65 - 6266 6802
Email: info.sg@leviat.com

Spain

Leviat

Polígono Industrial Santa Ana
c/ Ignacio Zuloaga, 20
28522 Rivas-Vaciamadrid
Tel: +34 - 91 632 18 40
Email: info.es@leviat.com

Sweden

Leviat

Vädursgatan 5
412 50 Göteborg
Tel: +46 - 31 - 98 58 00
Email: info.se@leviat.com

Switzerland

Leviat

Grenzstrasse 24
3250 Lyss
Tel: +41 (0)800 22 66 00
Email: info.ch@leviat.com

United Arab Emirates

Leviat

RA08 TB02, PO Box 17225
JAFZA, Jebel Ali, Dubai
Tel: +971 (0)4 883 4346
Email: info.ae@leviat.com

United Kingdom

Leviat

President Way, President Park,
Sheffield, S4 7UR
Tel: +44 - 114 275 5224
Email: info.uk@leviat.com

USA / Canada

Leviat

6467 S Falkenburg Road
Riverview, FL 33578
Tel: (800) 423-9140
Email: info.us@leviat.us

For countries not listed

Email: info@leviat.com